

12 SERIES

MOULDED WATER TRANSFER CENTRIFUGAL PUMPS



ONGA LASTS LONGER

The self-priming versions of the Hi-Flo range are suitable for pumping septic tank effluent. The 12 series surface mount, composite construction pumps have open impellers to handle soft solids and built in check valves offering excellent self-priming characteristics.

Horizontal, single-stage, surface mounted centrifugal pump with closed impeller for pumping debris free water coupled to a cool running Totally Enclosed Fan Cooled 2 pole motor with external thermal overload. (single phase only, three phase units require separate quick trip overload supplied by electrical contractor).


FEATURES

- High grade corrosion resistant materials
- Open design impeller
- Strong and durable construction
- Max. head - 20m
- Max. flow - 280lpm

APPLICATIONS

- Domestic, industrial or rural water transfer pump including grey water
- Sump emptying
- Effluent transfer
- Hydroponics
- Fountains and waterfalls

PERFORMANCE

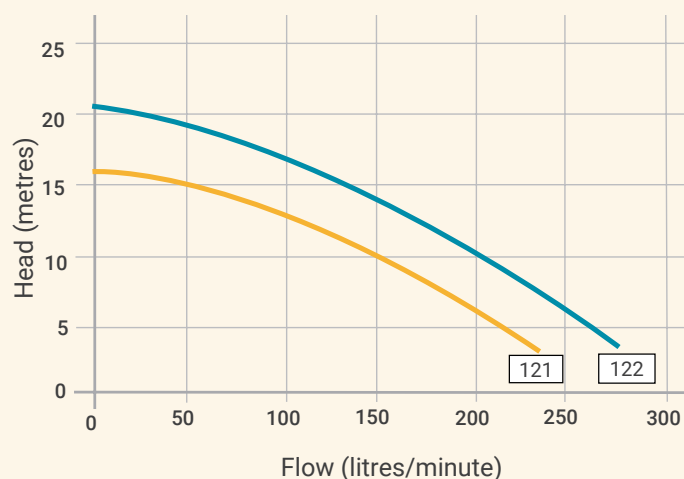

ONGA LASTS LONGER!

Model	Type of Current	Voltage ± 10%	Frequency Hz	Motor Rating kW P2	RPM	Current Ampere	Locked Rotor Current	Motor Protection	Insulation Class	IP Rating
121	1-phase	230	50	1.1	2900	10.8 A	38.8 A	Auto	B	IP 44
122	1-phase	230	50	1.1	2900	10.8 A	38.8 A	Auto	B	IP44
123	3-phase	400	50	1.1	2900	3.3 A	26.6 A	-	B	IP44