

TRADITIONAL SLIM LINE SERIES

FILTER HOUSINGS



FEATURES

- Slim design reduces space required for installation without sacrificing capacity
- Available in 5", 10" and 20" lengths
- Optional pressure relief button on inlet side of cap
- Leak-proof seal

PUMP INFORMATION

Pentair Slim Line Filter Housings are available in reinforced polypropylene in 5", 10" and 20" lengths. The black or blue reinforced polypropylene housing caps are available with 1/4", 3/8" or 1/2" NPT connections. Four bosses are molded into every cap for mounting purposes.


They are equipped with a black, reinforced polypropylene cap and offer an optional pressure-relief button on the inlet side to relieve pressure inside the housing when changing filter cartridges.

Opaque Slim Line Filter Housings, molded from rugged reinforced polypropylene, offer outstanding chemical compatibility and are ideal for use in a variety of low-flow applications. These applications include undersink and countertop residential filtration, pre- and post-reverse osmosis filtration, recreational vehicle filtration, foodservice and humidifying systems.

Clear Slim Line Filter Housings offer on-site examination of flow, performance, and cartridge life. They are also ideal for a variety of applications.

SPECIFICATIONS

Housing:	Polypropylene (opaque)
Cap:	Reinforced polypropylene
Button Assembly:	300 Series stainless steel, EPDM, and polypropylene
O-Ring:	EPDM
Temperature Rating:	40-125°F (4.4 - 51.7°C)
Maximum Pressure:	125 psi (8.6 bar)

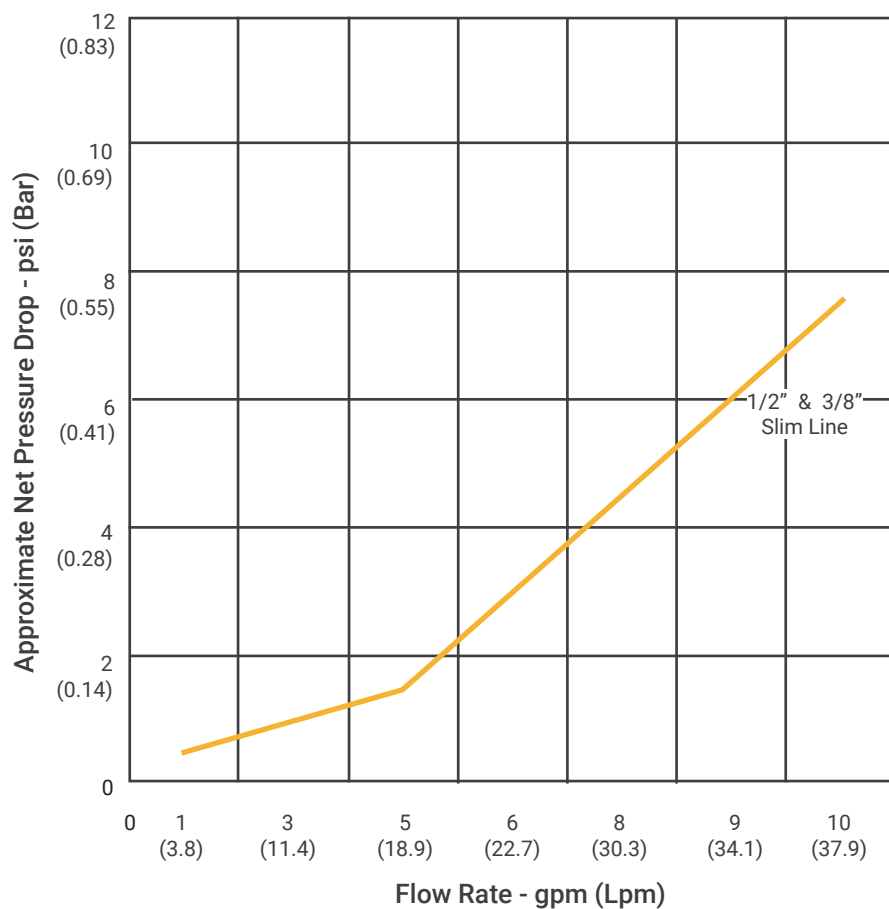

ACCESSORIES

Part #	Description
244047	SL-ZP Kit - Zinc Plated Bracket for SLim Line Housing
150539	SW-1A Wrench for Slim Line Housing

SPECIFICATIONS AND PERFORMANCE

Part #	Description	Maximum Dimensions	Initial ΔP (PSI) @ FLOW RATE (GPM)
158195*	1/2" #10 Slim Line Black/Blue w/PR	11.75" x 4.38" (298 mm x 111 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)

*NSF listed

CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.

